Rating	25A 12V DC	Mount Hole	Circuit Structure
Contact R	50m ohm Max.		
Insulation R	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Circuit	2P SPST ON-OFF		
Operating Temperature	-20℃~70℃		
Storage Temperature	-20℃~70℃		





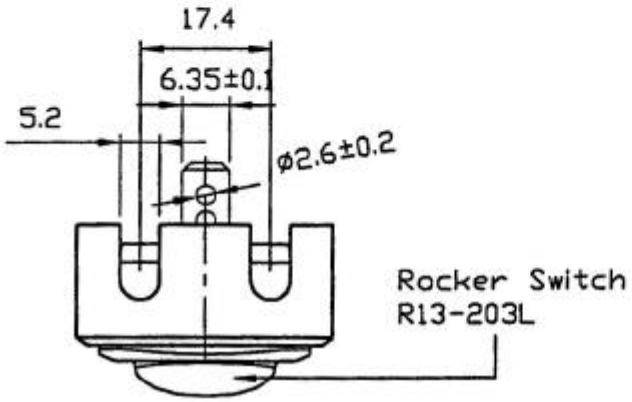

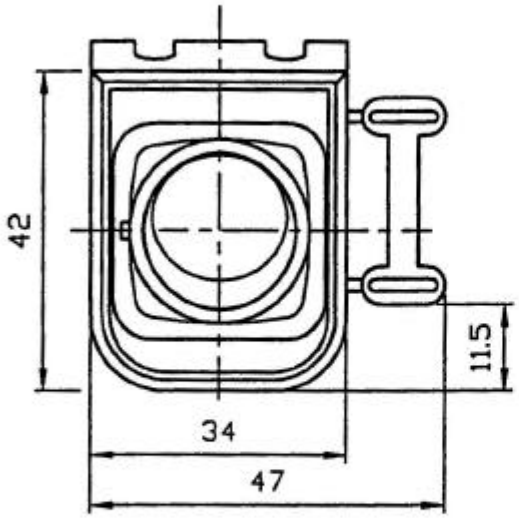

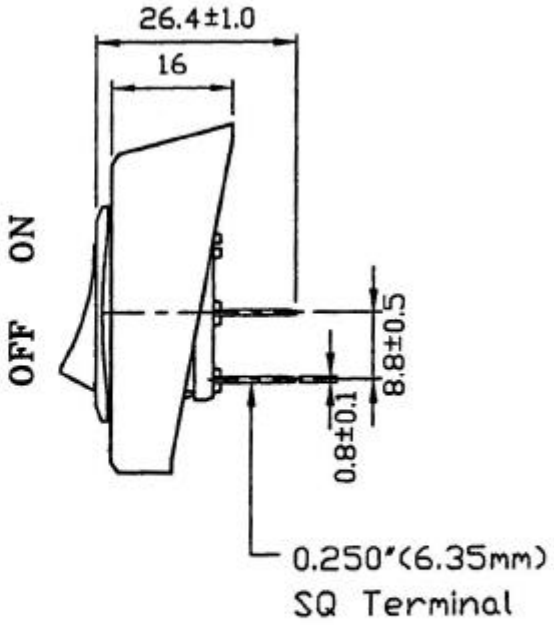

Tolerance ±0.3 except noted